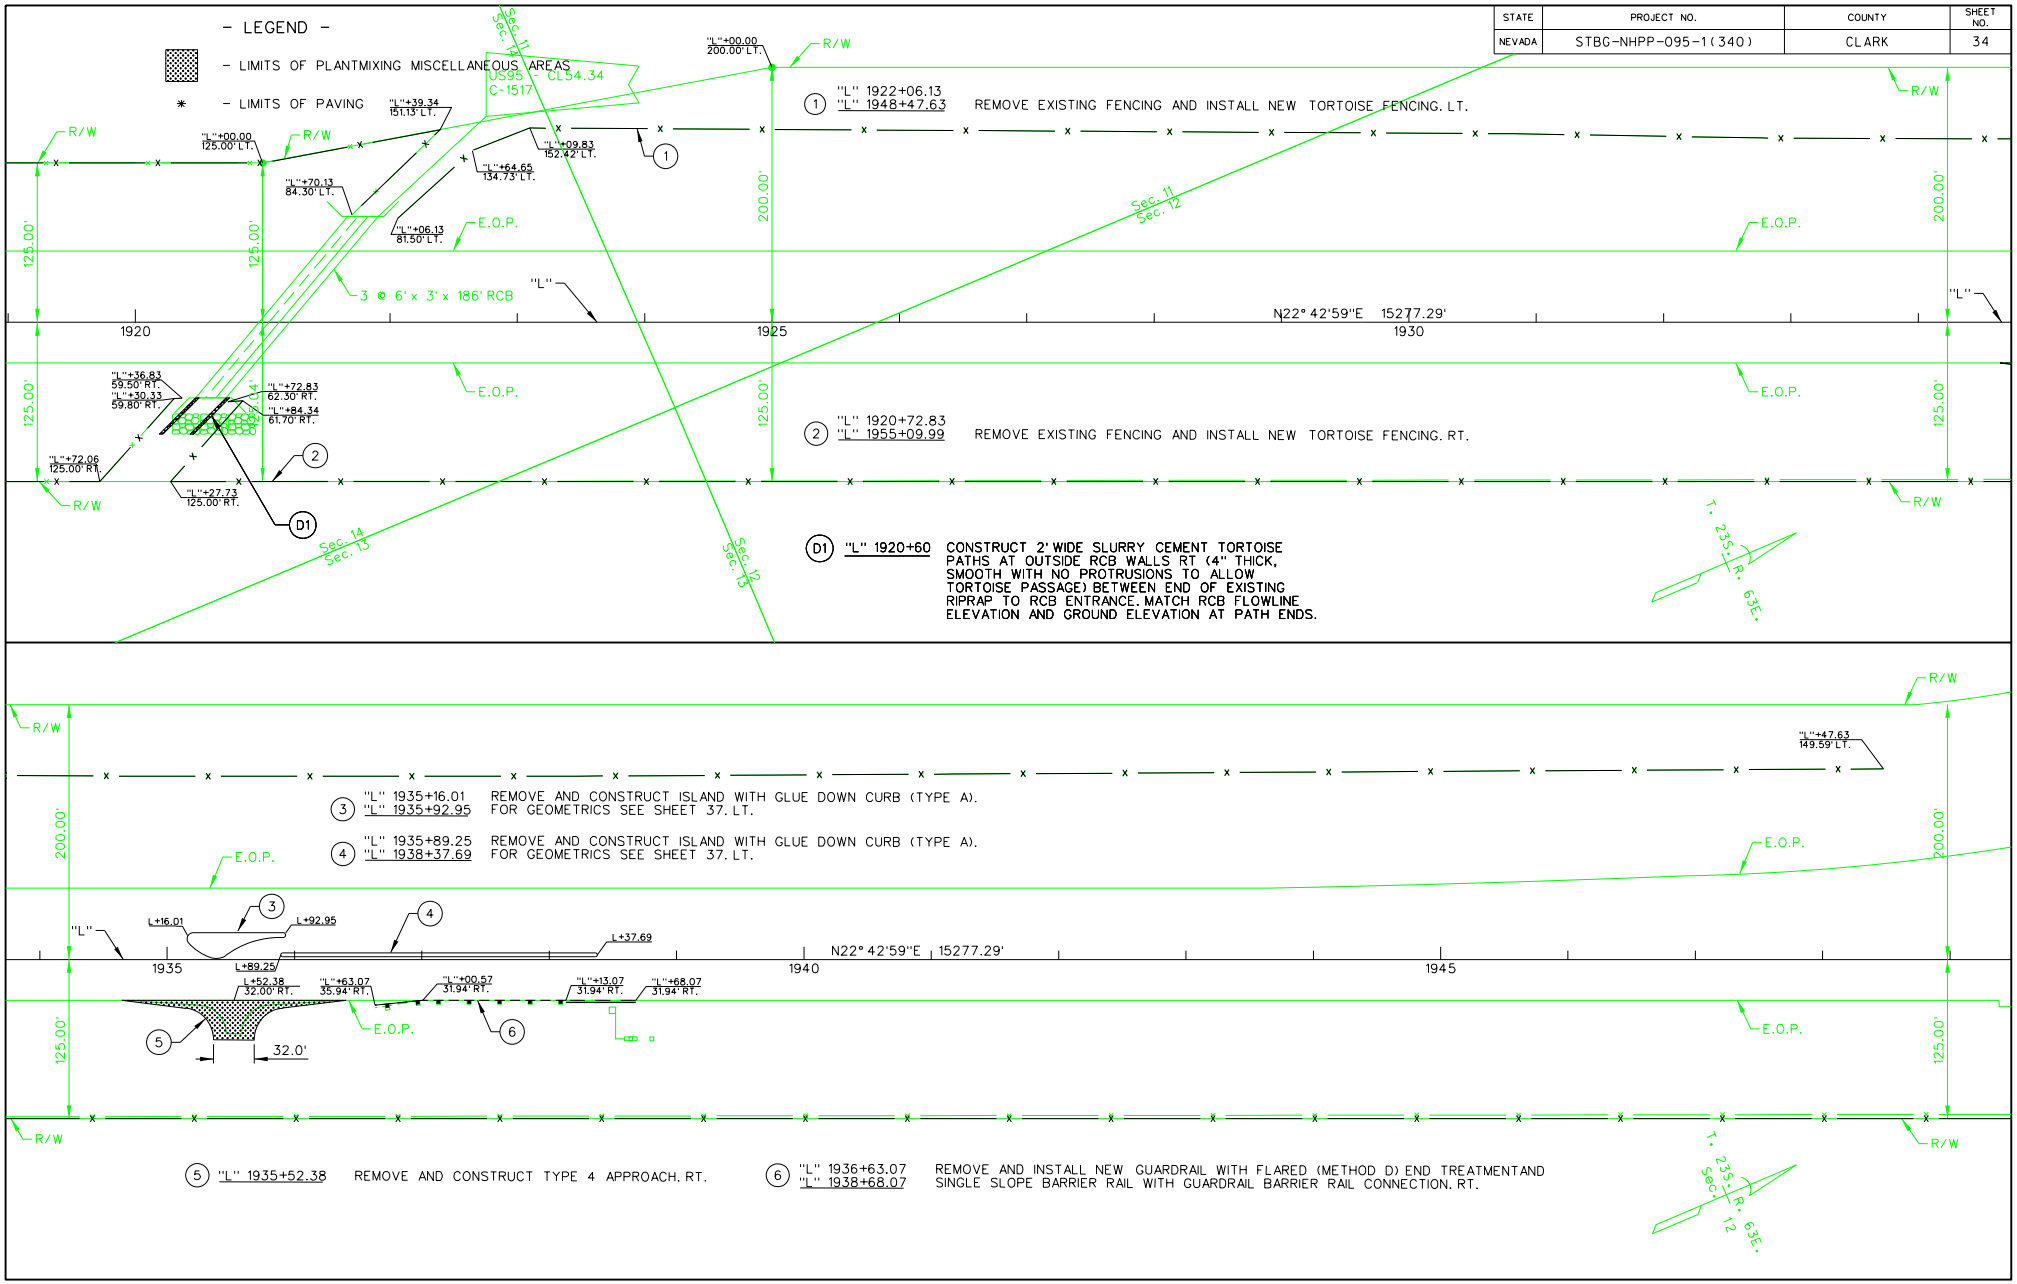

- LEGEND -
- LIMITS OF PLANTMIXING MISCELLANEOUS AREAS
* - LIMITS OF PAVING
STATE
PROJECT NO.
COUNTY
SHEET NO.
NEVADA
STBG-NHPP-095-1(340)
CLARK
34
US95 - CL54.34
C-1517
Sec. 11
Sec. 14
"L"+00.00 200.00' LT.
R/W
"L"+39.34 151.13' LT.
"L"+00.00 125.00' LT.
"L"+09.83 152.42' LT.
"L"+64.65 134.73' LT.
"L"+70.13 84.30' LT.
"L"+06.13 81.50' LT.
E.O.P.
3 @ 6' x 3' x 186' RCB
"L"
1920
1925
1930
N22° 42'59"E 15277.29'
200.00'
125.00'
1 "L" 1922+06.13 "L" 1948+47.63 REMOVE EXISTING FENCING AND INSTALL NEW TORTOISE FENCING. LT.
Sec. 11
Sec. 12
"L"+36.83 59.50' RT.
"L"+30.33 59.80' RT.
"L"+72.83 62.30' RT.
"L"+84.34 61.70' RT.
"L"+72.06 125.00' RT.
"L"+27.73 125.00' RT.
2 "L" 1920+72.83 "L" 1955+09.99 REMOVE EXISTING FENCING AND INSTALL NEW TORTOISE FENCING. RT.
Sec. 14
Sec. 13
Sec. 12
D1 "L" 1920+60 CONSTRUCT 2' WIDE SLURRY CEMENT TORTOISE PATHS AT OUTSIDE RCB WALLS RT (4" THICK, SMOOTH WITH NO PROTRUSIONS TO ALLOW TORTOISE PASSAGE) BETWEEN END OF EXISTING RIPRAP TO RCB ENTRANCE. MATCH RCB FLOWLINE ELEVATION AND GROUND ELEVATION AT PATH ENDS.
T. 23S., R. 63E.
"L"+47.63 149.59' LT.
3 "L" 1935+16.01 "L" 1935+92.95 REMOVE AND CONSTRUCT ISLAND WITH GLUE DOWN CURB (TYPE A). FOR GEOMETRICS SEE SHEET 37. LT.
4 "L" 1935+89.25 "L" 1938+37.69 REMOVE AND CONSTRUCT ISLAND WITH GLUE DOWN CURB (TYPE A). FOR GEOMETRICS SEE SHEET 37. LT.
L+16.01
L+92.95
L+37.69
L+89.25
1935
1940
1945
N22° 42'59"E 15277.29'
L+52.38 32.00' RT.
"L"+63.07 35.94' RT.
"L"+00.57 31.94' RT.
"L"+13.07 31.94' RT.
"L"+68.07 31.94' RT.
32.0'
5 "L" 1935+52.38 REMOVE AND CONSTRUCT TYPE 4 APPROACH. RT.
6 "L" 1936+63.07 "L" 1938+68.07 REMOVE AND INSTALL NEW GUARDRAIL WITH FLARED (METHOD D) END TREATMENT AND SINGLE SLOPE BARRIER RAIL WITH GUARDRAIL BARRIER RAIL CONNECTION. RT.
T. 23S., R. 63E.
Sec. 12